



DB9FTOTB50410


DB9 Female to 5-pin Terminal Block Adapter



Introduction

SUNIX DB9 Female to Terminal Block adapter can be used with SUNIX all RS-422/485 product lines, including PCI/PCIe Add-on card, Industrial DeviceServer, or DevicePort. It's convenient for user for RS-422 and RS-485 cable wiring with reliable locking design on standard DB9 connector.

Pin Assignment

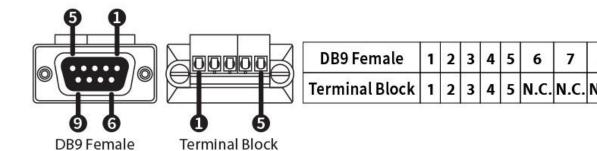



Specifications

Model	DB9FTOTB50410
Description	DB9 Female to 5-pin Terminal Block Adapter
Input Interface	DB9 Female
Output Interface	5-pin Terminal Block
Housing	TPE (Plastic)
Driver Support	Driver Free
Environment	Operation temp10 to 70°C (14 to 160°F) Operation humidity: < 95% non-condensing Storage temp20 to 85 °C (-4~185°F)
Regulatory Approvals	EUR: CE, EN55022 Class B, EN55024, EN6100032, EN6100033 US: FCC Part 15 Class B TAIWAN: BSMI: CNS13438 AS/NZS: CTick: CISPR22 JAPAN: VCCI
Green Environment	RoHS, CRoHS, WEEE
Weight	20g (0.7oz)
Dimensions	43.8(L) x 33.5(W) x 15.0(H) mm 33.5mm [1,32in] 16,8mm [0,66in] 15mm [0,59in] 15mm [0,59in] 17,5mm [0,69in] 17

Headquarters